


**Características**

Material:  
 Acero Inoxidable 316L contenido de  
 sulfuro:  
 0.005 - 0.017%


Dimensiones:  
 1/2" 3/4", 1", 1 1/2", 2", 2 1/2", 3", 4" y  
 6"

Pulimento interior:  
 Ra ≤ 0.5 µm  
 Pulimento exterior:  
 Ra ≤ 0.8 µm

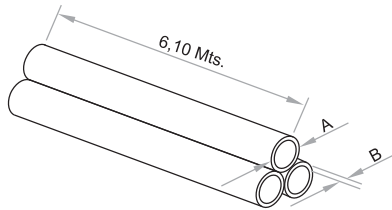

**Tubería Norma BPE**  
 ASTM A270 - Longitud 6,10 mt.

Referencia	Conexión	Inoxidable	A (OD)	B (Espesor)
ITC5204	1/2"	316L	12,7	1,65
ITC5205	3/4"	316L	19,1	1,65
ITC5206	1"	316L	25,4	1,65
ITC5208	1 1/2"	316L	38,1	1,65
ITC5210	2"	316L	50,8	1,65
ITC5212	2 1/2"	316L	63,5	1,65
ITC5214	3"	316L	76,2	1,65
ITC5218	4"	316L	101,6	2,11
ITC5222	6"	316L	152,4	2,77

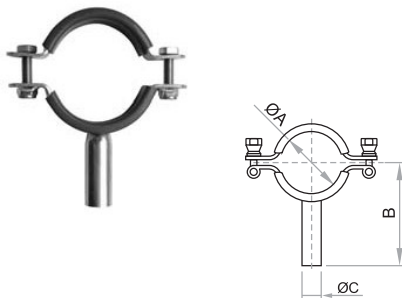

**Soportes para Tubería**

Referencia	Conexión	Inoxidable	A	B	C
IST5104	1/2"	304	12,7	67,5	8
IST5105	3/4"	304	19,1	67,5	8
IST5106	1"	304	25,4	84	10
IST5108	1 1/2"	304	38,1	90	10
IST5110	2"	304	50,8	76	10
IST5112	2 1/2"	304	63,5	86	10
IST5114	3"	304	76,2	92,5	10
IST5118	4"	304	101,6	102	10